

# UE1200-AA




## Ni-MH rechargeable cylindrical cell (Data Sheet)

### Specification

Nominal Voltage		1.2V	
Dimensions	Diameter	13.9±0.2mm	
	Height	50.0±0.3mm	
	Apx. Weight	25g	
0.2C Discharge Capacity	Typical	1250mAh	
	Minimum	1200mAh	
Typical Internal Impedance		Less than 25mΩ	
Charge	Standard	120mA for 16hrs	
	Fast	1200mA for about 75min	
Life expectancy		500 cycles	
Operating Temperature	Charge	Standard	0°C to 40°C
		Fast	10°C to 40°C
	Discharge		-10°C to 50°C
	Storage	< 1 year	-10°C to 30°C
< 3 months		-10°C to 40°C	


### Cell dimensions

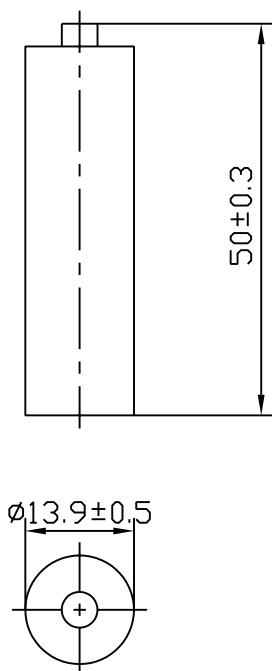


(With tube)

1:1

### Charge characteristics

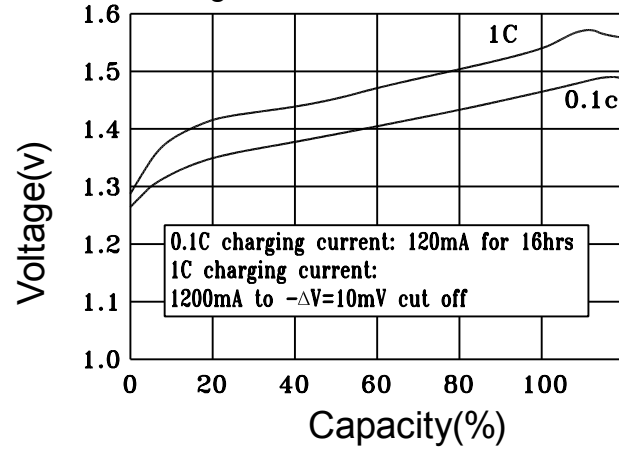

### Discharge characteristics

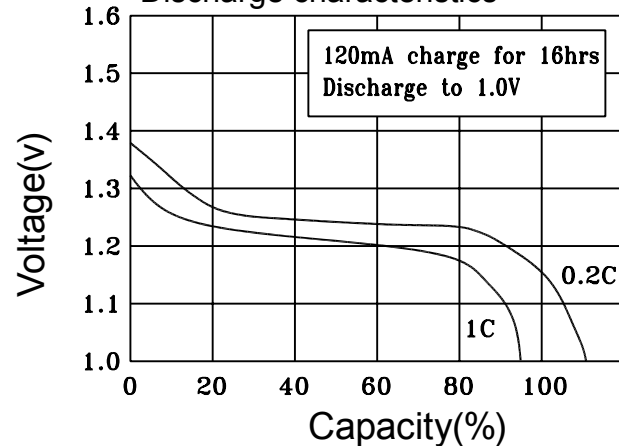

### Discharge characteristics at different temperature

